



PEGASUS®

M900/DDM Series



M900 Series equipped with Direct Drive Motor

PEGASUS ORIGINAL



Powerfull !!

Electricity Save!!

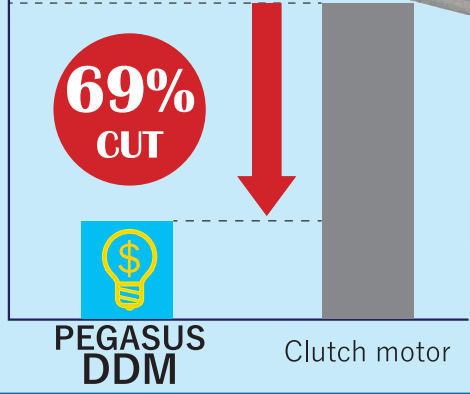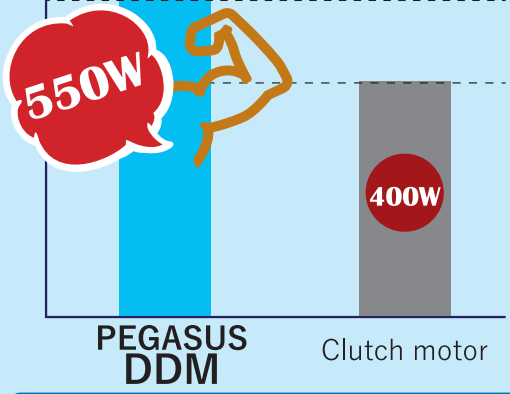

Point 1 Equipped with Direct Drive Motor


● **Pegasus Original Motor**
 Pegasus guarantee Quality and Safety.



● **CE Marking**
 Clearing all CE standard.



● **User Friendly**

- Quick and Easy Installation.
- Motor Structure
 - Sealed Motor Coil 
 - Dust Protection and Heat Prevention.
 - No Coupling
 - Direct Transmission and Easy Setup.
- High power, 550W.

Point 2 Dust Prevention

Dust Seal at Upper looper mechanism prevent from dust problem and No Damage on the machines.



M922/D222 : Double chainstitch machine


Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max.stich length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional device	Remarks
①	Binding tape	Light to medium	M922-02x250-24 /D222	2	4	5	-	3.8	0.7-1.7	3.5	5,500	DCx27 #14(90)	Binder 24mm(6)	PL/LC	

M932/D222 : Safety stitch machines

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max.stich length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional device	Remarks
②③	Plain seaming	Medium	M932-38-3x4 /D222	2	5	3	4	3.8	0.7-1.7	5.5	5,500	DCx27 #14(90)		PL/LC	
			M932-70-5x5 /D222			5	5								
		Extra heavy	M932-86-5x6 /D222			5	6	5.3	0.6-1.3			DCx27 #21(130)	Caterpillar presser foot		
④	Shirring	Light to medium	M932-48-3x4 /D222	2	5	3	4	3.3	1-2.8	5.5	5,000	DCx27 #14(90)	Shirring device		
⑤	Shirring while piping	Light to medium	M932-48P2-3x4 /D222	2	5	3	4	3.3	1-2.8	5	5,000	DCx27 #14(90)	Shirring device Binder 25mm		
⑥	3-needle versatile	Medium	M932-355-3x2x4 /D222	3	6	3+2	4	3.8	0.7-1.7	5.5	5,500	DCx27 #11(75)			
⑦	Attaching U-shaped tape	Medium	M932-551-5x2.5x3.5 /D222	3	6	5+2.5	3.5	3.8	0.7-1.7	5.5		DCx27 #11(75)			

M952/D222 : Overedgers

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max.stich length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional device	Remarks	
⑧	Blindstich hemming	Light to medium	M952-01-4/D222	1	3	-	4	3.8	0.7-1.7	5.5	5,500	DCx27 #9(65)				
⑨⑩	Plain seaming	Light to medium	M952-17-4/D222	2	4	2	4	3.8	0.7-1.7	5.5		5,500	DCx27 #9(65)	Needle plate with chaining land, With presser foot for attaching tape	PL/LC	Multi use for plain seam and attach tape
			M952-13-2x4 /D222				4									
		M952-13-2x5 /D222	5													
		M952-13H-2x4 /D222	4													
		M952-13H-2x5 /D222	5													
		M952-13H-2x7 /D222	7													
		M952-52-2x4 /D222	4													
		M952-52-2x5 /D222	5													
		M952-52H-2x4 /D222	4													
		M952-52H-2x5 /D222	5													
⑪	Turn down hemming	Light	M952-16S2-1.5 /D222	1	3	-	1.5	3.8	0.7-1.7	5.5		DCx27 #11(75)				
⑫⑬	Backlatching	Light to medium	M952-180-4/D222	1	3	-	4	3.8	0.7-1.7	5.5		4.8	DCx27 #9(65)	Manual backlatching device(BT9C)		
			M952-181-2x4 /D222	2	4	2										
⑭	Butt-end sewing	Light to medium	M952-90-6/D222	1	2	-	6	3.8	0.7-1.7	3	5,000	DCx27 #14(90)				

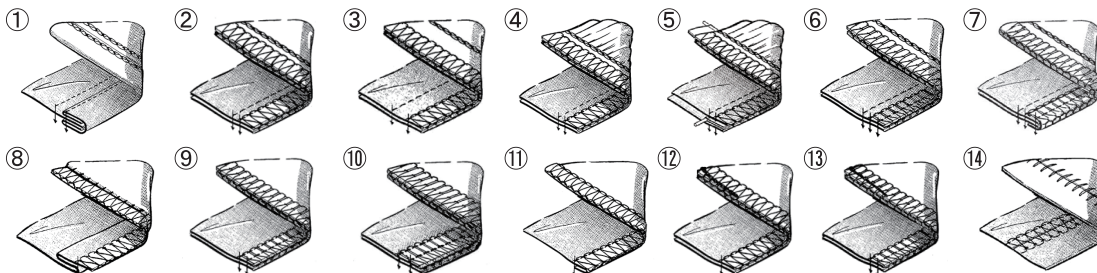

PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 / FAX : +81-6-6454-8785

<http://www.pegasus.co.jp>

※ The specification and/or appearance for equipment described in this catalog are subject to change because of modification without previous notice.

©2018 PEGASUS SEWING MACHINE MFG. CO., LTD.
Catalog No. 103061 Produced February 2018.